Morgan Wagon Owner's Manual Model No: 71101 71103

Do not return this product to store! If any parts are missing or damaged, please contact Customer Service by phone at 1-973-960-2688 or e-mail help@morgancycle.com



Warning: Adult assembly required!

IMPORTANT SAFETY INFORMATION

- For child age 1 and up.
- Adult supervision is required! Never leave your Child unattended on or near this product.
- Never use near steps, sloped driveways, hills, roadways, alleys, swimming pool areas!
- Never use the Wagon on rough terrain, or for jumping, stunts or other types of abusive playing!
- Periodically re-check all fasteners to make sure they are tight!
- Never allow your Child ride on the wagon, this is NOT the ride-on toy!




Please keep small parts, hardware and plastic bags out of children's reach.

Please keep this Owner's Manual for future reference. If you sell or give this product to someone, please include the plastic pouch containing, and Owner's Manual and ask the new owner to read the instructions completely before operating.

Please read this owner's Manual completely before operating this product. All parts are wrapped to prevent damage during shipment. Remove all packing materials from the product prior to operating. Refer to the Parts List and Diagram of this manual to make sure all parts are accounted for.

Note: Information contained in Owners Manual may be changed or updated. Please visit our website listed below: www.morgancycle.com

Tool Required: Screw Driver, and two 6" Adjustable wrenches

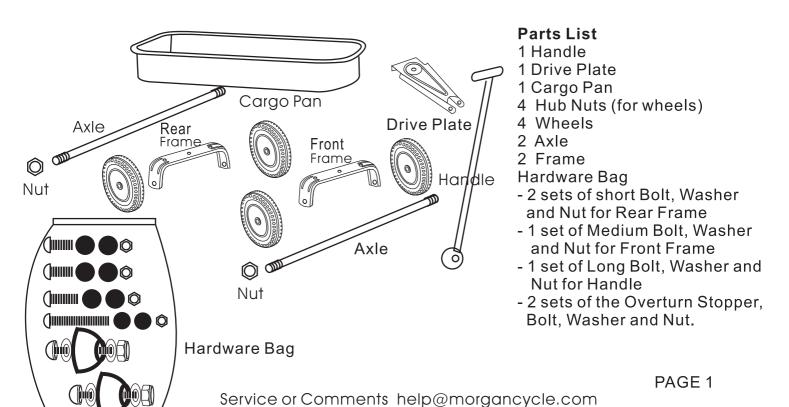

CAUTION: Avoid scratching Wagon Body when Assembling the Wagon!


Step 1 Locate Cargo Pan, 2 Frames, 2 short Bolts, 1 medium Bolt, 3 Nuts, and Drive Plate as shown in Figure 2. Tighten the Bolts, washers and Nuts by Screw Driver and Adjustable Wrench.


Step 2 Locate two holes close to Front Frame of the Cargo Pan, shown as in Figure 3. Tighten the Bolts, Washers, Plastic Stoppers and Nuts using Screw driver and Adjustable Wrench.


The Plastic Stopper is to restrict the front frame overturning.

Step 3 Locate the Wheels, Axles and Hub Nuts as shown in the Figure 4. Tighten the Hub Nuts by wrenches.

Step 4 Connect the Handle and Drive Plate by Long Bolt and Nut, tighten the Bolt and Nut by Screw Drive and Wrench. As shown in the Figure 5.

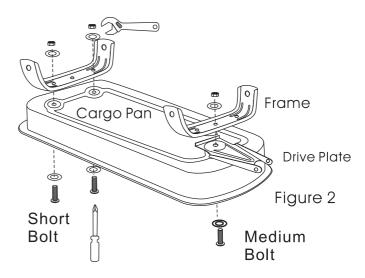

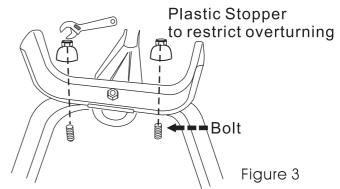

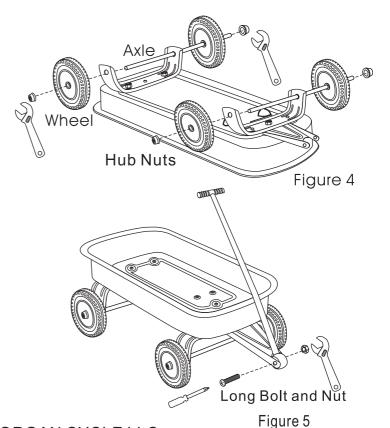

MORGAN CYCLE LLC Union, New Jersey 07083 www.morgancycle.com 1-973-960-2688

Page 2